

USER MANUAL
MANUALE D'USO



ZZEN200WW

PAR LED COB 200W WORM WHITE COOL WHITE
PAR LED COB 200W BIANCO CALDO BIANCO FREDDO


Thanks for purchasing this ZZIPP product, please read this instruction carefully to understand how to operate the product correctly. Please store this instruction in a safe place after reading as a reference in the future.

SAFETY INSTRUCTIONS

To reduce the risk of electric shock, do not remove the cover or the side. Always contact qualified personnel for repairs.



To reduce the risk of fire and electric shock, do not expose the appliance to moisture and direct contact with liquids.

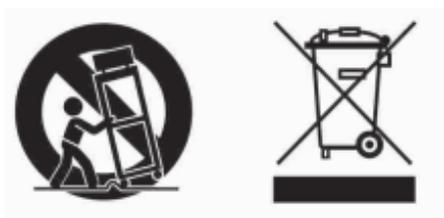

Transport the product only using the handles. Don't shake it.

To avoid the risk of fire or shock do not expose the product to rain or direct and excessive humidity. If the environment is much colder than the temperature of this product, wait for it to adjust to room temperature before turning it on. Do not use the product for permanent installations. Only connect the product to circuits grounded and protected.

Always disconnect it from the power supply before cleaning it or replacing the fuse.

Replace the fuse with another of the same type and the same rated voltage.

Do not clean the product with solvents or aggressive detergents. Use a soft, clean cloth.

Before connecting the product to a power supply, make sure the cable of power supply is not damaged.

Make sure that the voltage of the electrical outlet is within the range indicated on the product (on the housing or on a sticker).

Never disconnect the product from the socket by pulling the cord.

Always make sure that the product is used in a location with adequate ventilation with at least 50 cm of space from adjacent surfaces. Make sure that none of the ventilation openings are obstructed.

Do not use the product at temperatures above 104 ° F / 40 ° C.

Keep flammable materials away from the product during use.

Do not touch the product when it is switched on or immediately after switching off. The product and its housing can reach high temperatures.

If you experience serious problems while using the product, stop using it immediately.

Do not open the product housing. Contains parts that cannot be repaired by the user and such opening would void the warranty.

FEATURES

- Compact PAR LED easy to use.
- Suitable for indoor use
- The ideal choice if you need big power in a compact box that can be easily positioned anywhere.

CHECK THE CONTENTS


- ZZEN200WW
- Barn doors
- Power Cord
- User manual

UNPACKING INSTRUCTIONS

Carefully unpack the product to make sure all the parts are in the package and are in good condition.

If the box or the contents (the product and included accessories) appear damaged from shipping, or show signs of mishandling, notify the carrier or dealer/seller immediately. In addition, keep the box and contents for inspection.

KEY DESCRIPTION

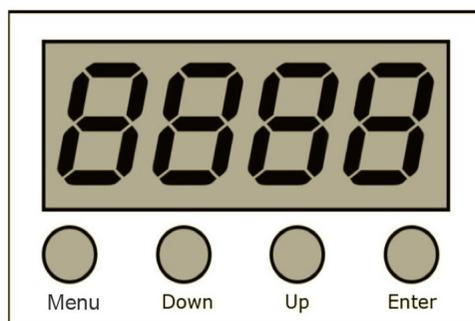

MENU: Access the menu

DOWN: "reduction key" or "key under the selected"; decrease the value function down menu

UP: "add key" or "selection on the key"; increase the value function, shift on the menu

ENTER: Is used to select and confirm/store the current selection

3 ch Mode

Channel	Function	Description
CH1	Warm White DIMMER	Warm white dimming, from dark to bright
CH2	Cool White DIMMER	Cool white dimming, from dark to bright
CH3	Total strobe / Shutter	Cool warm white total strobe, from slow to fast

2 ch Mode

Channel	Function	Description
CH1	Warm White DIMMER	Warm white dimming, from dark to bright
CH2	Cool White DIMMER	Cool white dimming, from dark to bright

Display Instruction

Deatail	Range	Description
A001	001- 512	DMX512 address code setting-3 channel mode
d001	001- 512	DMX512 address code setting-2 channel mode
u255	000 - 255	Warm white dimming, from dark to bright.
C255	000 - 255	True white dimming, from dark to bright.
FH00	01 - 99	Strobe, speed from slow to fast.

SPECIFICATION

Input power: AC90~240V wide voltage range input

Light source: COB LED 200W

Channel: 2/3 channel



imported and distributed by:

ZZIPP Group S.p.A.
 Via Caldevigo 23/d, 35042 Este (PD)
 0429 617 888
 info@zzippgroup.com
 zzippgroup.com


Grazie per aver acquistato questo prodotto ZZIPP, si prega di leggere attentamente queste istruzioni per capire come utilizzare correttamente il prodotto. Si prega di conservare queste istruzioni in un luogo sicuro dopo averle lette come riferimento per il futuro.

ISTRUZIONI DI SICUREZZA

Per ridurre il rischio di scosse elettriche, non rimuovere il coperchio o il lato. Contattare sempre personale qualificato per le riparazioni.



Per ridurre il rischio di incendio e di scosse elettriche, non esporre l'apparecchio all'umidità e al contatto diretto con i liquidi.

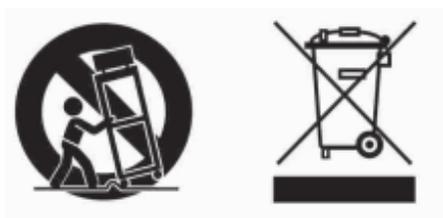

Trasportare il prodotto solo usando le maniglie. Non scuoterlo.

Per evitare il rischio di incendio o shock non esporre il prodotto alla pioggia o all'umidità diretta ed eccessiva. Se l'ambiente è molto più freddo della temperatura di questo prodotto, attendere che si adatti alla temperatura ambiente prima di accenderlo. Non utilizzare il prodotto per installazioni permanenti. Collegare il prodotto solo a circuiti messi a terra e protetti. Scollegarlo sempre dall'alimentazione prima di pulirlo o sostituire il fusibile. Sostituire il fusibile con un altro dello stesso tipo e della stessa tensione nominale. Non pulire il prodotto con solventi o detergenti aggressivi. Usare un panno morbido e pulito. Prima di collegare il prodotto all'alimentazione, assicurarsi che il cavo dell'alimentazione non sia danneggiato.

Assicurarsi che il voltaggio della presa elettrica rientri nella gamma indicata sul prodotto (sulla custodia o su un adesivo).

Non scollegare mai il prodotto dalla presa tirando il cavo.

Assicurarsi sempre che il prodotto sia usato in un luogo con adeguata ventilazione con almeno 50 cm di spazio dalle superfici adiacenti. Assicurarsi che nessuna delle aperture di ventilazione sia ostruita.

Non usare il prodotto a temperature superiori a 104 ° F / 40 ° C.

Tenere i materiali infiammabili lontano dal prodotto durante l'uso.

Non toccare il prodotto quando è acceso o immediatamente dopo lo spegnimento. Il prodotto e il suo alloggiamento possono raggiungere temperature elevate.

Se si verificano gravi problemi durante l'uso del prodotto, smettere di usarlo immediatamente.

Non aprire l'alloggiamento del prodotto. Contiene parti che non possono essere riparate dall'utente e tale apertura renderebbe nulla la garanzia.

CARATTERISTICHE

- PAR LED compatti facili da usare.
- Adatti per uso interno
- La scelta ideale se si ha bisogno di grande potenza in un box compatto che può essere facilmente posizionato ovunque.

CONTENUTO


- ZZEN200WW
- Alette paraluce
- Cavo di alimentazione
- Manuale utente

ISTRUZIONI PER IL DISIMBALLAGGIO

Disimballare con cura il prodotto per assicurarsi che tutte le parti siano nella confezione e siano in buone condizioni.

Se la scatola o il contenuto (il prodotto e gli accessori inclusi) appaiono danneggiati dalla spedizione o mostrano segni di manipolazione impropria, avisare immediatamente il vettore o il rivenditore/venditore. Inoltre, conservare la scatola e il contenuto per l'ispezione.

DESCRIZIONE TASTI DISPLAY

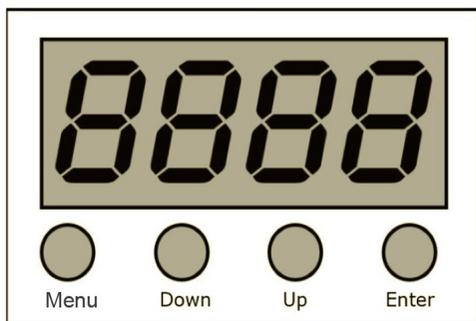

MENU: Accesso al menu

DOWN: Diminuisce il valore del parametro o scende nel menu.

UP: Aumenta il valore del parametro o sposta nel menu.

ENTER: Sceglie e conferma/memorizza l'attuale selezione.

3 ch Mode

Canale	Funzione	Descrizione
CH1	DIMMER Bianco Caldo	Bianco caldo, da scuro a luminoso
CH2	DIMMER bianco freddo	Bianco freddo, da scuro a luminoso
CH3	Strobo totale/otturatore	Strobo totale da lento a veloce

2 ch Mode

Canale	Funzione	Descrizione
CH1	DIMMER Bianco Caldo	Bianco caldo, da scuro a luminoso
CH2	DIMMER bianco freddo	Bianco freddo, da scuro a luminoso

Display

Codice	Range	Descrizione
A001	001- 512	Impostazione del codice indirizzo DMX512: modalità a 3 canali
d001	001- 512	Impostazione del codice indirizzo DMX512: modalità a 2 canali
u255	000 - 255	Bianco caldo, da scuro a luminoso.
C255	000 - 255	Bianco freddo, da scuro a luminoso.
FH00	01 - 99	Strobo, velocità da lenta a veloce.

SPECIFICHE

Potenza in ingresso: ingresso con ampio intervallo di tensione AC90 ~ 240 V

Sorgente luminosa: LED COB 200W

Canale: 2/3 canali



importato e distribuito da:

ZZIPP Group S.p.A.
 Via Caldevigo 23/d, 35042 Este (PD)
 0429 617 888
 info@zzippgroup.com
 zzippgroup.com

