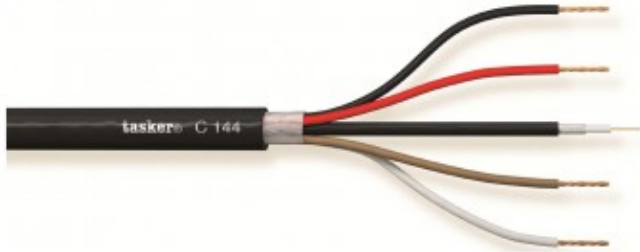

KOMBY -1 VIDEO + SWITCH + POWER 1X0.08 (75) + 4X0.50 BLACK 100MT

Combined cable 75Ohm -
1x0.08 (75Ohm) + 4x0.50
mm

For Video Installation,
Security and Camcorder
applications.

Référence C144



Black fireproof PVC sheath.

External diameter of the cable 8.50 (ñ 0.20) mm.

The conductors are grouped among the conductors with non-woven polyester filler.

75Ohm coaxial cable:

Black fireproof PVC.

Outside diameter of the cable. 2.80 (ñ 0.20) mm.

O.F.C. 100% coated tinned copper spiral.

Core insulation with PEE. Diam. 1.60 (ñ 0.20) mm.

Formation of red copper strands 10x0,10 mm.

Nom. Section 1x0.08 mm².

Free conductors:

Sheaths in fireproof PVC. Colored: Black, Red, White, Brown.

Red copper stranded formation O.F.C. 16x0.20 mm.

Nominal section 4x0.50 mm².

Ownership:

0.50 mm² Conductors 38.00 Ohm / Km

Resistance of the coaxial conductor 203 Ohm / Km

Impedance 75 Ohm

Core / Shield capacitance 67 pF / m

Operating temperature -20 / + 70 °C

Attenuation dB / 100m:

50 MHz 17.50

100 MHz 25.51

200 MHz 40.53

400 MHz 59.10

RoHS3 Compliant: Ver. B / 16.05.19