KOMBY -1 VIDEO + SWITCH + POWER 1X0.08 (75) + 4X0.50 BLACK 100MT

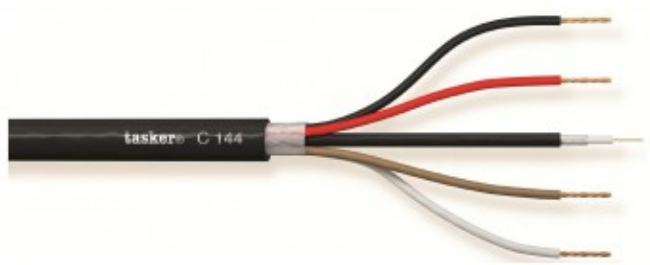

Combined cable 75Ohm - 1x0.08 (75Ohm) + 4x0.50 mm
For Video Installation, Security and Camcorder applications.

Reference: C144

Black fireproof PVC sheath.
External diameter of the cable 8.50 (ñ 0.20) mm.
The conductors are grouped among the conductors with non-woven polyester filler.
75Ohm coaxial cable:
Black fireproof PVC.
Outside diameter of the cable. 2.80 (ñ 0.20) mm.
O.F.C. 100% coated tinned copper spiral.
Core insulation with PEE. Diam. 1.60 (ñ 0.20) mm.
Formation of red copper strands 10x0,10 mm.
Nom. Section 1x0.08 mmý.
Free conductors:
Sheaths in fireproof PVC. Colored: Black, Red, White, Brown.
Red copper stranded formation O.F.C. 16x0.20 mm.
Nominal section 4x0.50 mmý.
Ownership:
0.50 mmý Conductors 38.00 Ohm / Km
Resistance of the coaxial conductor 203 Ohm / Km
Impedance 75 Ohm
Core / Shield capacitance 67 pF / m
Operating temperature -20 / + 70 ø C
Attenuation dB / 100m:
50 MHz 17.50
100 MHz 25.51
200 MHz 40.53
400 MHz 59.10
RoHS3 Compliant: Ver. B / 16.05.19