


---

# KOMBY -1 VIDEO + SWITCH + POWER 1X0.08 (75) + 4X0.50 BLACK 100MT

Combined cable 75Ohm -  
1x0.08 (75Ohm) + 4x0.50  
mm

For Video Installation,  
Security and Camcorder  
applications.

Reference: C144

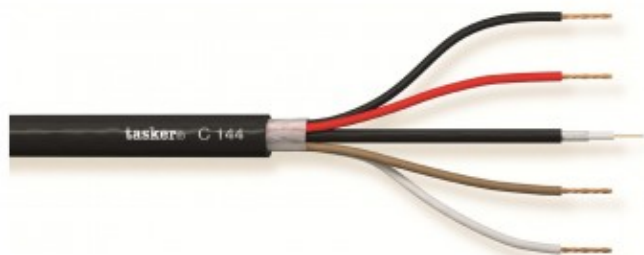

Black fireproof PVC sheath.

External diameter of the cable 8.50 (ñ 0.20) mm.

The conductors are grouped among the conductors with non-woven polyester filler.

75Ohm coaxial cable:

Black fireproof PVC.

Outside diameter of the cable. 2.80 (ñ 0.20) mm.

O.F.C. 100% coated tinned copper spiral.

Core insulation with PEE. Diam. 1.60 (ñ 0.20) mm.

Formation of red copper strands 10x0,10 mm.

Nom. Section 1x0.08 mm<sup>2</sup>.

Free conductors:

Sheaths in fireproof PVC. Colored: Black, Red, White, Brown.

Red copper stranded formation O.F.C. 16x0.20 mm.

Nominal section 4x0.50 mm<sup>2</sup>.

Ownership:

0.50 mm<sup>2</sup> Conductors 38.00 Ohm / Km

Resistance of the coaxial conductor 203 Ohm / Km

Impedance 75 Ohm

Core / Shield capacitance 67 pF / m

Operating temperature -20 / + 70 °C

Attenuation dB / 100m:

50 MHz 17.50

100 MHz 25.51

200 MHz 40.53

400 MHz 59.10

RoHS3 Compliant: Ver. B / 16.05.19